

# Economy Series 6m

**P-SERIES P0600/240/350**

## Frame Specifications:

**Span width:** 6.00m

**Eave height:** 2.40m

**Ridge height:** 3.50m

**Peak height:** 20

**Bay distance:** 5.00m

**Roof pitch:** 180

**Main profile (upright / truss):**

89/48/3mm (2-channel) or

110/48/3mm (4-channel)

**Eave connection type:**

Galvanised steel insert

**Longest component:** 3.74

**Aluminium type:**

Hard pressed / high impact extruded

anodised aluminium

to DIN 4112


**Steel connections:**

European-hot dipped

galvanised to DIN 50976

**Wind Loading:**

80km/hr(0.30kN/m<sup>2</sup>)

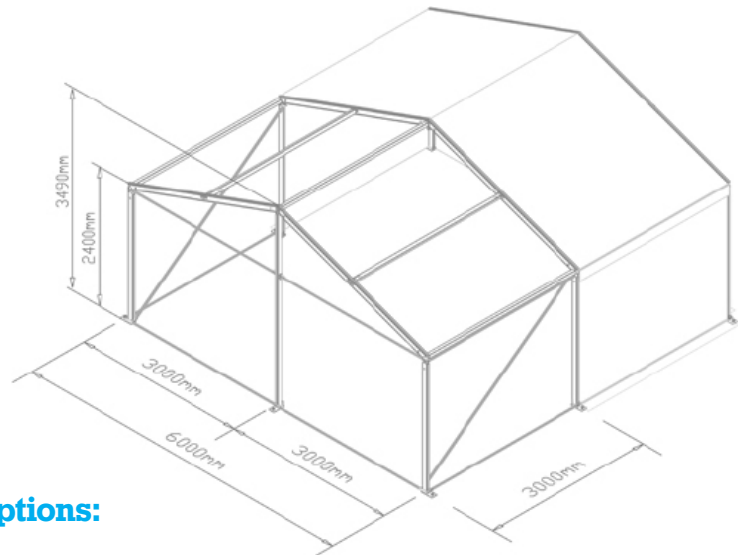

## Walling Options:

- Translucent PVC walling
- OPAQUE PVC walling
- PVC window walls
- ABS Solid cassette walling system
- Glass cassette walling system

## Roof Options:

- Clear PVC
- Translucent PVC
- OPAQUE PVC
- High peaked roof conversions

## Accessories available

- Steel sub-framed flooring system
- Cassette flooring system
- High peaked roof conversions
- Hexagonal end bays
- Octagonal end bays
- Lean-to extensions
- Linings
- Double door units
- Single door units
- Entrance porches
- Ramp units
- Portal beams
- Adjustable leg inserts
- Gutter systems
- Stake pullers



**Specialist suppliers of temporary event and industrial structures**