

Economy Series 10m

P-SERIES P1000/240/423

Frame Specifications:

Span width: 10.00m

Eave height: 2.40m

Ridge height: 4.23m

Roof pitch: 20

Main profile (upright / truss):

89/48/3mm (2-channel) or

110/48/3mm (4-channel)

Eave connection type:

Galvanised steel insert

Longest component: 5.37

Aluminium type:


Hard pressed / high impact
extruded anodised aluminium
to DIN 4112

Steel connections:

European-hot dipped galvanised
to DIN 50976

Wind Loading:

80km/hr(0.30kN/m²)

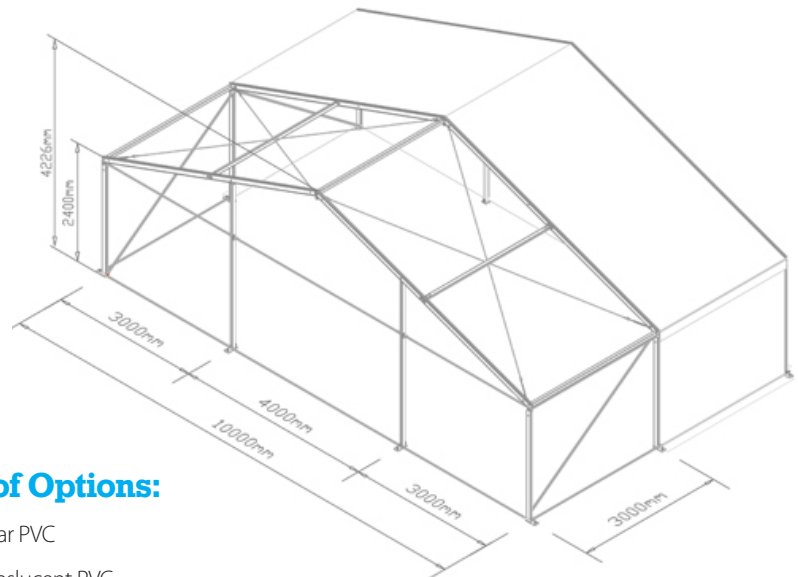

Walling Options:

- Translucent PVC walling
- OPAQUE PVC walling
- PVC window walls
- ABS Solid cassette walling system
- Glass cassette walling system

Roof Options:

- Clear PVC
- Translucent PVC
- OPAQUE PVC
- High peaked roof conversions

Accessories available

- Steel sub-framed flooring system
- Cassette flooring system
- High peaked roof conversions
- Hexagonal end bays
- Octagonal end bays
- Lean-to extensions
- Linings
- Double door units
- Single door units
- Entrance porches
- Ramp units
- Portal beams
- Adjustable leg inserts
- Gutter systems
- Stake pullers



Specialist suppliers of temporary event and industrial structures