

# Warehousing Series 20m

## L-SERIES L2000/520/845

### Frame Specifications:

**Span width:** 20.00m

**Eave height:** 5.20m

**Ridge height:** 8.45m (internal)

**Peak pitch:** 18

**Main profile (upright / truss):**

334-122-8mm (4-channel)

**Eave connection type:**

Galvanised steel insert

**Longest component:** 10.65

**Aluminium type:**

Hard pressed / high impact extruded aluminium

**Steel connections:**


European - hot dipped galvanised to DIN 50976

**Wind Loading:**

100km/hr (0.47kN/m)

**Snow Loading:**

75kg/m

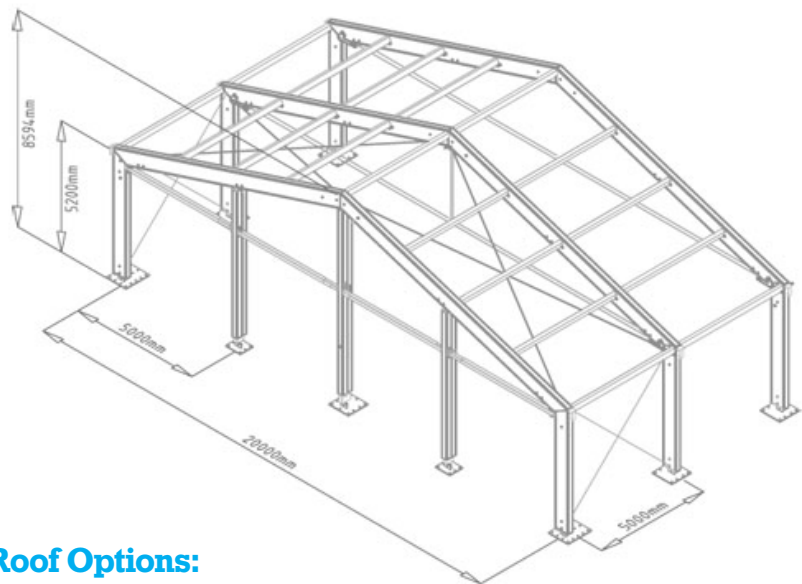

### Walling Options:

- ▶ PVC walling (soft) translucent
- ▶ PVC walling (soft) OPAQUE
- ▶ Corrugated steel walling
- ▶ Insulated steel walling  
40mm / 60mm / 70mm
- ▶ Glass cassette walling system

### Roof Options:

- ▶ Single Layer Roof

### Accessories available

- ▶ Personnel door units
- ▶ Cassette flooring system
- ▶ Heavy weight floor system
- ▶ Means of escape (MOE) door units
- ▶ Steel sliding door units
- ▶ Roller shutter door units (electric and manual)
- ▶ Speed roller shutter door units
- ▶ HVAC (Heating, ventilation and air-conditioning)
- ▶ Portal beams
- ▶ Gutter systems
- ▶ Lighting systems
- ▶ Racking systems
- ▶ Vented gable triangles