

# Warehousing Series 15m

**L-SERIES LT1500/620/863**

## Frame Specifications:

**Span width:** 15.00m

**Eave height:** 6.20m

**Ridge height:** 8.63m (internal)

**Peak pitch:** 18

**Main profile (upright / truss):**

252-122-4mm (4-channel)

**Eave connection type:**

Galvanised steel insert

**Longest component:** 8

**Aluminium type:**

Hard pressed / high impact extruded aluminium

**Steel connections:**


European - hot dipped galvanised to DIN 50976

**Wind Loading:**

100km/hr (0.47kN/m)

**Snow Loading:**

75kg/m

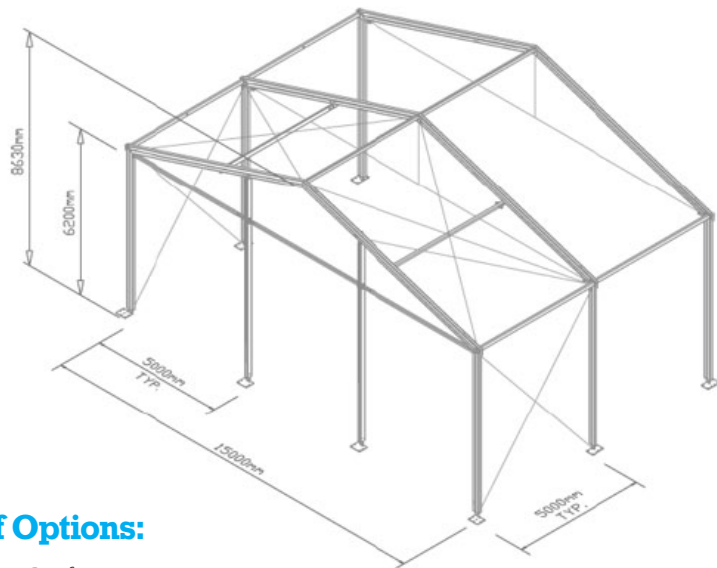

## Roof Options:

- › Thermo Roof

## Walling Options:

- › PVC walling (soft) translucent
- › PVC walling (soft) OPAQUE
- › Corrugated steel walling
- › Insulated steel walling  
40mm / 60mm / 70mm
- › Glass cassette walling system

## Accessories available

- › Personnel door units
- › Cassette flooring system
- › Heavy weight floor system
- › Means of escape (MOE) door units
- › Steel sliding door units
- › Roller shutter door units  
(electric and manual)
- › Speed roller shutter door units
- › HVAC (Heating, ventilation and air-conditioning)
- › Portal beams
- › Gutter systems
- › Lighting systems
- › Racking systems
- › Vented gable triangles



**Specialist suppliers of temporary event and industrial structures**