

Warehousing Series 20m

L-SERIES LT2000/520/845

Frame Specifications:

Span width: 20.00m

Eave height: 5.20m

Ridge height: 8.45m (internal)

Peak pitch: 18

Main profile (upright / truss):

334-122-8mm (4-channel)

Eave connection type:

Galvanised steel insert

Longest component: 10.65

Aluminium type:

Hard pressed / high impact extruded aluminium

Steel connections:



European - hot dipped galvanised to DIN 50976

Wind Loading:

100km/hr (0.47kN/m)

Snow Loading:

75kg/m

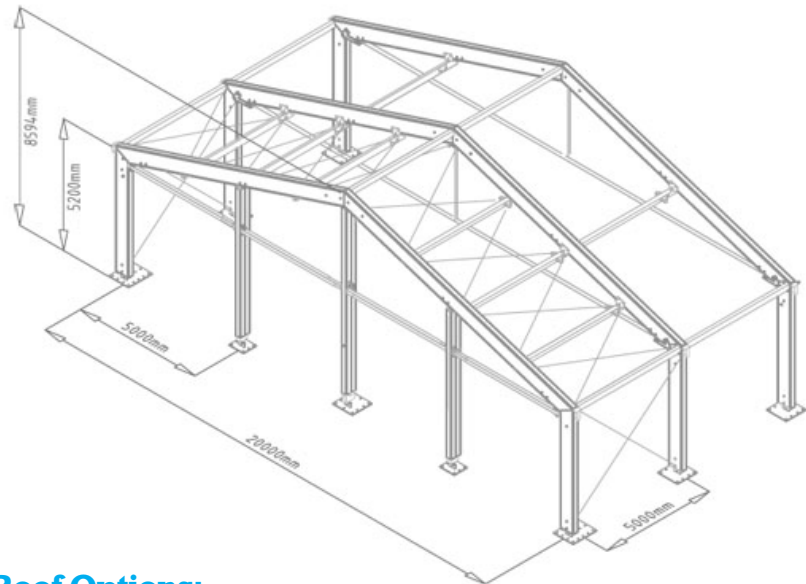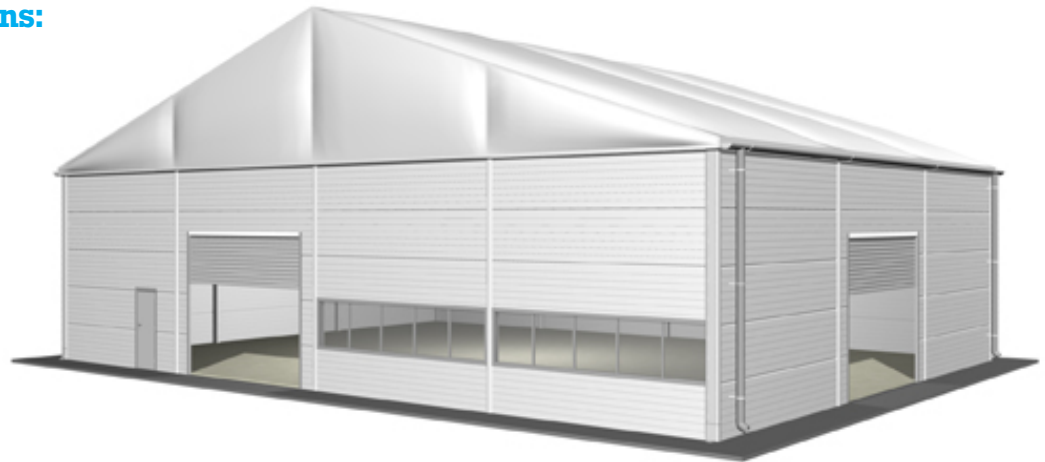

Walling Options:

- PVC walling (soft) translucent
- PVC walling (soft) OPAQUE
- Corrugated steel walling
- Insulated steel walling
40mm / 60mm / 70mm
- Glass cassette walling system

Roof Options:

- Thermo Roof

Accessories available

- Personnel door units
- Cassette flooring system
- Heavy weight floor system
- Means of escape (MOE) door units
- Steel sliding door units
- Roller shutter door units (electric and manual)
- Speed roller shutter door units
- HVAC (Heating, ventilation and air-conditioning)
- Portal beams
- Gutter systems
- Lighting systems
- Racking systems
- Vented gable triangles